Quick Installation Guide

Debian Based

Copyright © 2021 Apache OpenOffice.org Documentation Team

Legal Notice

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is found at https://www.gnu.org/licenses/fdl-1.3.en.html

Contributor

Marcia K Wilbur

Pre-Installation: Remove LibreOffice

If Libreoffice is on the system, remove libreoffice.
As root or sudo:

```
apt-get remove --purge libreoffice* libexttextcat-data*
apt-get autoremove
```

Install OpenOffice.org

Step 1. Download the package

https://www.openoffice.org/download/other.html

Step 2. Extract files

```
tar -xvzf Apache_OpenOffice_4.1.8_Linux_x86-64_install-deb_en-US.tar.gz
```

Step 3. Installation

```
dpkg -i en-US/DEBS/*.deb
dpkg -i en-US/DEBS/desktop-integration/*.deb
```

Verify installation.

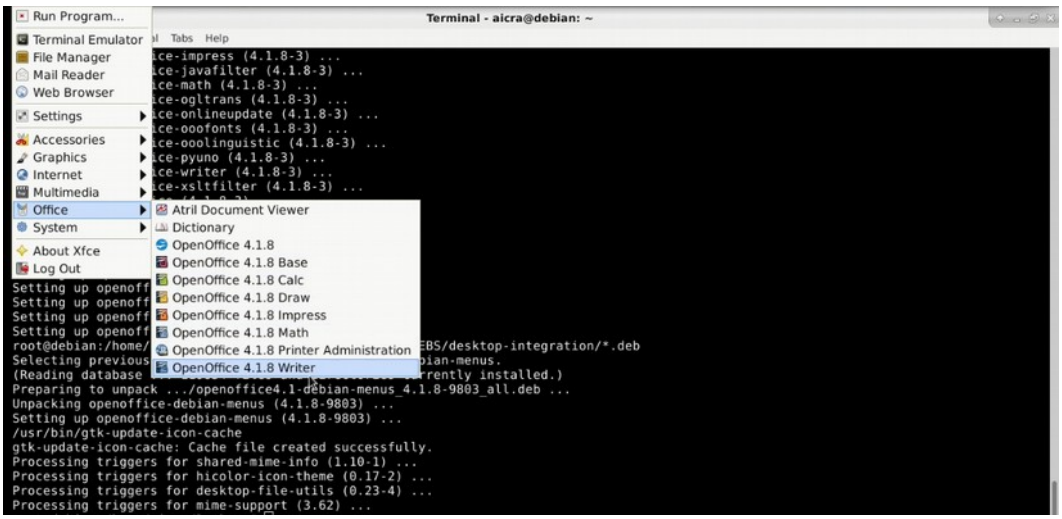

Step 4. Open Writer

Click the **Writer** option.

Step 5. Setup OpenOffice.org

Enter the user first name, last name and initials.
This will only be required one time after installation and apply to Base, Calc, Draw, Impress, Math and Writer.

Click **Next**.

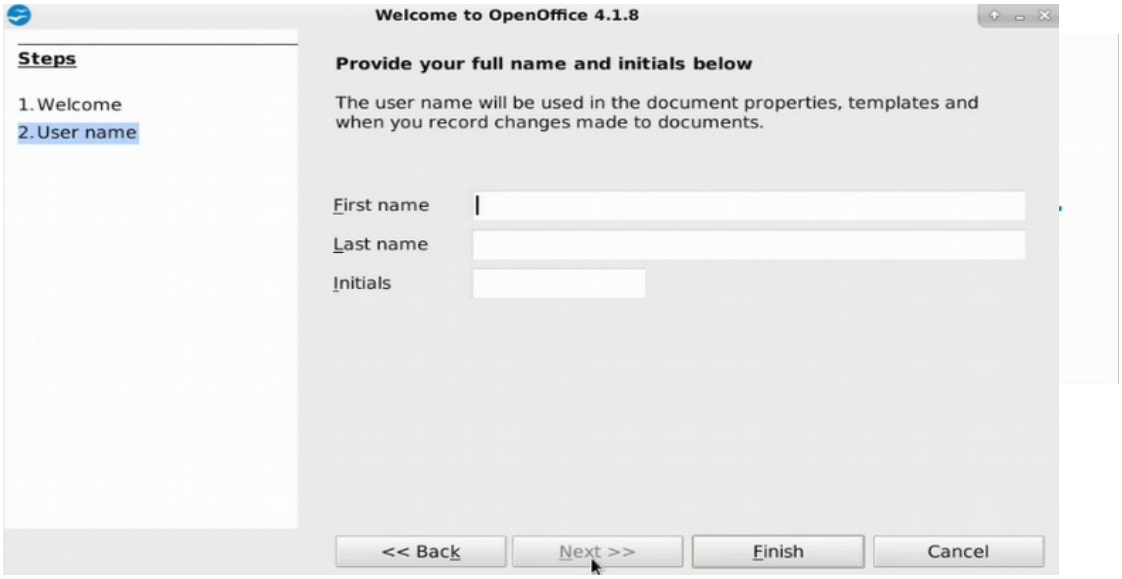

Enter the First Name, Last Name and initials.
Click **Finish**.
The OpenOffice logo displays.
OpenOffice Writer opens and is ready to use.

Apache OpenOffice 4

free and open-source for 20 years

Build contributed by members of the Apache OpenOffice community
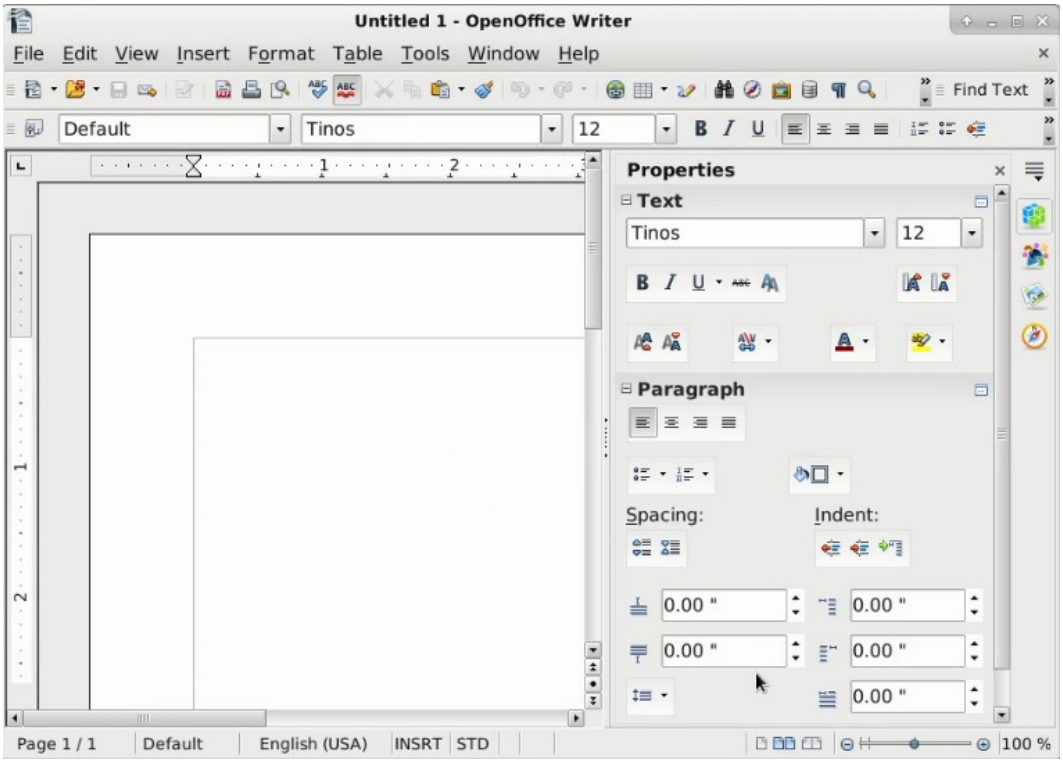
APACHE SOFTWARE FOUNDATION